



Gregory Kalogiannis, George Hassapis

Department of Electrical and Computer Engineering,
Aristotle University of Thessaloniki, 54124 Thessaloniki, Greece
gkalogiannis@ece.auth.gr, chasapis@eng.auth.gr

INTRODUCTION

In this study we propose an improvement in the processing technique which is applied to Electroencephalography (EEG) signals with the purpose to recognize motor imagery movements and use this finding in performing brain-based control of rehabilitation devices. This technique identifies in the patient signal the occurrence of desynchronization and synchronization (ERD/ERS) events related with motor imagery. However, to do this, the received patient signal is first subjected to the removal of environmental and system noise as well as interference noise which correspond to normal human activities such as eye blinking and cardiac motion (artifacts). This kind of processing has to take place within time limits imposed by the on-line control requirements of the rehabilitation devices.

Second Order Blind Identification (SOBI) independent component analysis (ICA) algorithm is a widely used algorithm in removing artifacts. This algorithm, however, presents long processing time making the overall time for motor imagery movement identification not suitable for brain-based control of rehabilitation devices. A rework of this algorithm based on SCHUR decomposition, results to an accelerated determination of the imagery movement.

RESULTS

The evaluation of the EEG processing with the purpose of identifying motor imagery movement based on SOBI and modified SOBI algorithms are shown in the following table. It becomes evident that a reduction of almost 80% in the execution time is achieved.

Dataset	Execution time of EEG processing algorithms in seconds	
	based on typical SOBI	based on modified SOBI
1	9.845235	1.567458
2	10.379097	1.845277
3	11.514513	1.814460
4	9.800095	1.739605
5	9.799495	1.600469

CONTACT AUTHORS




METHODS

During imagery motor movements tasks, the so called mu and beta ERD and ERS are taking place, allowing us to determine human patient imagery movement. These imagery tasks, which can be recognized as power suppression and spikes, indicate that the ERD/ERS events of imagery motor movements are taking place. However, original recordings of EEG data contain environmental and system noise and interference that corresponds to normal human activity such as eye-blinking and cardiac motion which need to be removed in order to isolate the ERS/ERD events from the rest of the signal.

In order to remove noise that is correlated with eye movement (EOG) and heart motion (ECG), the Second Order Blind Identification (SOBI) source separation algorithm can be used. The algorithm works with the use of joint diagonalization on a set of partial covariance matrices. The SOBI modification addressed in this study concerns the way that covariance matrices are diagonalized.

In order to determine the imagery movement, power and energy features of the signal obtained after the removal of artifacts are compared with the same features of classified signals from an available database and the class to which the processed signal belongs, is identified. The database classification is done off-line by using the SVM algorithm

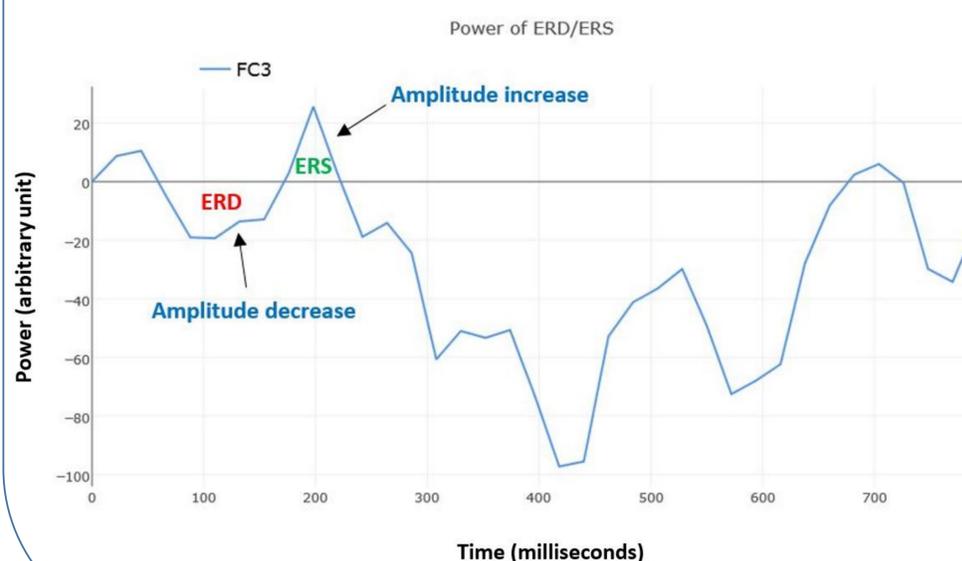

CONCLUSIONS

This study introduces a new process technique of EEG signals produced by motor imagery movements.. This technique focused on ERD/ERS of motor imagery movements phenomena, with the combination of an improved variant of SOBI algorithm, which is used as an ICA filter during brain signal processing. This improvement is established using the compound diagonalization of an unpredictable set of covariance matrices and SCHUR decomposition.

Several experiments were conducted using pre-recorded datasets demonstrating that a significant computation time reduction is achieved against typical SOBI technique.